


DEVICE NAME : CRQ 99128 (H)	Page # : 1 of 1
Mechanical Data :	Date : 03/12/2021
	ISSUED BY : Wang Heng
	Rev Date : Index #:

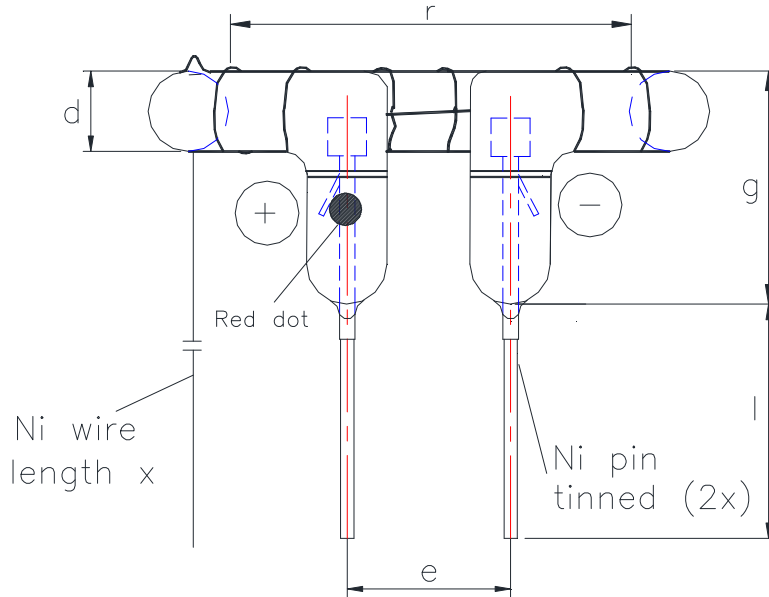

Dimension(mm)

e	20 +/-1	l	35 +/-2	d	12 +/-1
r	36 +/-1.5 dia	g	28 +/-2	x	80 +/-5
o					

Polarity :

Without Colour Corrective Coating :

Remarks: 1) Envelope material: Q1
2) RoHS Compliant

Operating Data :

Max. Power Pmax/W		Trigger coil TR	ZS1052 (H)
Nom. Power Pnom / W		Trigger capacitor Cz/μF	0.1
Max. flashenergy Emax/Ws	1000	Min. trigger voltage Uz min/V	250
Nom. flashenergy Enom/Ws		Trigger contact S	SCR
Max. anode voltage Uamax/V	900	Flash frequency/Hz	
Nom. anode voltage Uanom/V		Life/Number of flashes/N	TBD *
Min. anode voltage Uamin/V	500	Repetition rate trep/ s	TBD *
Nom.flash capacitor CB/ μF		Sec trigger voltage Uz sec / KV	-ve
Light reduction after life/ %		Unloaded	

Remarks :

*Need to be determined for specific application